



IQL48045A050V009R

TDK LAMBDA

Buy Now



Looking for a discount?

[Check out our current promotions!](#)

Give us a call

1-855-837-4225

International: 1-415-281-3866

Email Us

Sales and New Orders: sales@verical.com

Order Support: support@verical.com


Suppliers: [Visit our seller page](#)

Company Address

Arrow Electronics, Inc
9201 East Dry Creek Road
Centennial, CO 80112

72-308W, 18 to 36V or 36 to 75V Input Isolated DC-DC Quarter Brick

<https://product.tdk.com/en/power/iQL>
www.emea.lambda.tdk.com/uk/products/iql

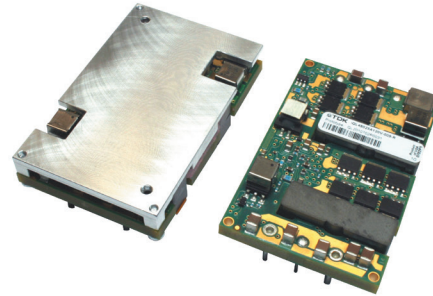

Industrial



Test



COMM



Broadcast

The iQL series of isolated DC-DC converters deliver up to 308W in a compact and high-performance industry standard quarter footprint. Capable of operating from nominal input voltages of 24V (18-36V) or 48V (36 to 75V), the converter provides fully regulated outputs from 1.2V up to 28V for demanding environments in telecom, datacom, computing and industrial applications. The output voltage can be adjusted from -20 to +10% of nominal using the trim connection to accommodate non-standard voltages.

Features	Benefits
• High Operating Efficiency up to 94%	• Reduces Heat Losses/Dissipation in System
• Open frame or Baseplate Construction	• Mounting Flexibility for Low profile or Conduction Cooling
• Available from 1.2V up to 28V outputs	• Flexible and wide output voltage coverage for various loads
• Constant Switching Frequency	• Predictable EMI
• Monotonic Start-Up Into a Pre-Bias Output	• Reliable and Stable Output in Multi-Load conditions

Model Selector									
Model	Input Voltage (V)	Output Voltage (V)	Output Adjust Range (A)	Max Current (A)	Max Power (W)	Efficiency	On/Off Polarity	Pic Length (inch)	Baseplate
iQL24021A120V-001-R	20 - 36	12	9.6 - 13.2	21	252	92.0%	Neg	0.145"	Yes
iQL24021A120V-009-R	20 - 36	12	9.6 - 13.2	21	252	92.0%	Neg	0.180"	Yes
iQL24040A050V-001-R	18 - 36	5	4.0 - 5.5	40	200	91.0%	Neg	0.145"	Yes
iQL24040A050V-009-R	18 - 36	5	4.0 - 5.5	40	200	91.0%	Neg	0.180"	Yes
iQL24050A033V-009-R	18 - 36	3.3	2.64 - 3.63	50	165	90.5%	Neg	0.180"	Yes
iQL48011A280V-008-R	36 - 75	28	22.4 - 30.8	11	308	92.5%	Pos	0.180"	Yes
iQL48011A280V-009-R	36 - 75	28	22.4 - 30.8	11	308	92.5%	Neg	0.180"	Yes
iQL48011A280V-0A9-R *	36 - 75	28	16.8 - 30.8	11	308	92.5%	Neg	0.180"	Yes
iQL48025A120V-001-R	36 - 75	12	9.6 - 13.2	25	300	94.0%	Neg	0.145"	Yes
iQL48025A120V-009-R	36 - 75	12	9.6 - 13.2	25	300	94.0%	Neg	0.180"	Yes
iQL48025A120V-0B9-R	36 - 75	12	9.6 - 13.2	25	300	94.0%	Neg	0.180"	No
iQL48045A050V-001-R	36 - 75	5	4.0 - 5.5	45	225	91.0%	Neg	0.145"	Yes
iQL48045A050V-009-R	36 - 75	5	4.0 - 5.5	45	225	91.0%	Neg	0.180"	Yes
iQL48045A050V-0B3-R **	36 - 75	5	4.0 - 5.5	45	225	91.0%	Neg	0.145"	No
iQL48045A050V-0B9-R	36 - 75	5	4.0 - 5.5	45	225	91.0%	Neg	0.180"	No
iQL48060A033V-003-R **	36 - 75	3.3	2.64 - 3.63	60	198	91.0%	Neg	0.145"	Yes
iQL48060A033V-009-R	39 - 75	3.3	2.64 - 3.63	60	198	91.0%	Neg	0.180"	Yes
iQL48060A033V-0B9-R	39 - 75	3.3	2.64 - 3.63	60	198	91.0%	Neg	0.180"	No
iQL48060A025V-008-R	36 - 75	2.5	2.0 - 2.75	60	150	89.0%	Pos	0.180"	Yes
iQL48060A025V-0B3-R **	36 - 75	2.5	2.0 - 2.75	60	150	89.0%	Neg	0.145"	No
iQL48060A025V-0B9-R	36 - 75	2.5	2.0 - 2.75	60	150	89.0%	Neg	0.180"	No
iQL48060A012V-0B3-R **	36 - 75	1.2	0.96 - 1.32	60	72	83.5%	Neg	0.145"	No

Notes

* With higher OCP limit up to 15A

** Non Latching OVP

Related Products		
Type	Part Number	Description
Isolated DC-DC Converter	iQG	300W-504W, Input 36-75V, Isolated Quarter Brick
Isolated DC-DC Converter	iEH	300W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	iEA	78W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	GQA	120W Industrial, Input 9-36V, Isolated Quarter Brick
Non-Isolated DC-DC Converter	iBH	80W/20A, 3.5-14Vin, 0.7 - 5.5Vout, DOSA Compatible
Non-Isolated DC-DC Converter	iCH	85W/12A, 4.5-14Vin, 0.7 - 8.5Vout, DOSA Compatible
Non-Isolated DC-DC Buck-Boost Converter	i7C	300W, Input 9-53V or 9-36V, Output 9.6-48V 8A, 5-28V 12.5A or 8-24V 20A
Input Filter	iDQ	75V / 10A Filter
Evaluation Board	FQX-HQA-EVK-D0	Evaluation board (no modules) that fits standard Eighth or Quarter brick and FQx or iDQ input filters

Specifications							
Model		1.2V	2.5V	3.3V	5V	12V	28V
Input							
Input Voltage Range	(iQL24) (iQL48)	Vdc	18 - 36		20 - 36		
			36 - 75				
Input Transient, 100 ms		Vdc	50 (iQL24); 100 (iQL48)				
Input Current (max)	(iQL24) (iQL48)	A		12	13	14.5	
			3	5.2	7	7.5	10.5
Turn-ON Input Voltage (typ)	(iQL24) (iQL48)	Vdc	16.9		19.9		
			34.2 - 34.9				
Turn-OFF Input Voltage (typ)	(iQL24) (iQL48)	Vdc	16.0		18.8		
			32.4 - 33.2				
Efficiency (typical)		%	Refer to Model Selector Table				
Safety Certifications and Markings		-	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark and UKCA Mark				
Output							
Output Voltage Initial Setpoint	(iQL24) (iQL48)	Vdc		3.23 - 3.37	4.88 - 5.12	11.3 - 11.9	
			1.17 - 1.23	2.45 - 2.55		11.7 - 12.3	27.4 - 28.6
Output Voltage Tolerance	(iQL24) (iQL48)	Vdc		3.20 - 3.40	4.85 - 5.15	11.2 - 12.0	
			1.16 - 1.24	2.42 - 2.58	3.23 - 3.37	11.6 - 12.4	27.2 - 28.8
Line Regulation	(iQL24) (iQL48)	mV		2	4	40	
			1	1.5	2	3	50
Load Regulation	(iQL24) (iQL48)	mV		2	4	70	
			1	1.5	3	3	40
Remote Sense			Yes	Yes	Yes	Yes ⁽³⁾	Yes
External Load Capacitance	(iQL24) (iQL48)	uF		488 - 40,000	488 - 25,000	470 - 5,000	
			488 - 60,000	488 - 40,000		488 - 8,000	480 - 3,300
Ripple & Noise (typ)	(iQL24) (iQL48)	mVpp		27	27	65	
			30	30	35	40	310
Switching Frequency (fixed)	(iQL24) (iQL48)	kHz		125	130	120	
			110	125	130	125	125
Overcurrent Protection (hiccup)	(iQL24) (iQL48)	A		57	44	23	
			71	69	70	54	12.5
Over Voltage Protection ⁽²⁾		Vdc	1.5	3.1	4.1	6.1	33.2
Over Temperature Protection		-	Auto recovery				
Environmental							
Operating Temperature (Tc)		°C	-40 up to 125 (maximum temperature is model dependent, check the product specifications)				
Storage Temperature		°C	-55 to 125				
Humidity (non condensing)		%RH	10 - 95				
Cooling		-	Conduction, convection or forced air (See product specifications for derating)				
Isolation Voltage		Vdc	1500 (Input to Output; Output to Baseplate)				
Shock		-	MIL-STD-202G, Method 213B, Test Condition 1				
Vibration		-	5 to 50 Hz (0.5g); 50 to 500 Hz (1.5g); three axes; Bellcore TR-EOP-000063-5.4.4				


Specifications		1.2V	2.5V	3.3V	5V	12V	28V
Other							
Weight (max)	g	70 (baseplate); 55 (open frame)					
Size (LxWxH)	mm	57.91 x 36.83 x ≤13.21					
Size (LxWxH)	Inches	2.28 x 1.45 x ≤0.52					
MTBF - Telcordia SR-332 (100% Load, 40°C)	MHrs	> 3					
Warranty	yrs	3					

Notes

- (1) See website for detailed product specifications.
- (2) Default Over Voltage Protection is Latching unless otherwise indicated. Refer to Model Selector Table.
- (3) iQL24021A120V has remote sense, iQL48025A120V does not have remote sense.

Mechanical Specification

Dimensions are in mm [in]. Unless otherwise specified tolerances are: $x.x \pm 0.5$ [0.02], $x.xx$ and $x.xxx \pm 0.25$ [0.010].

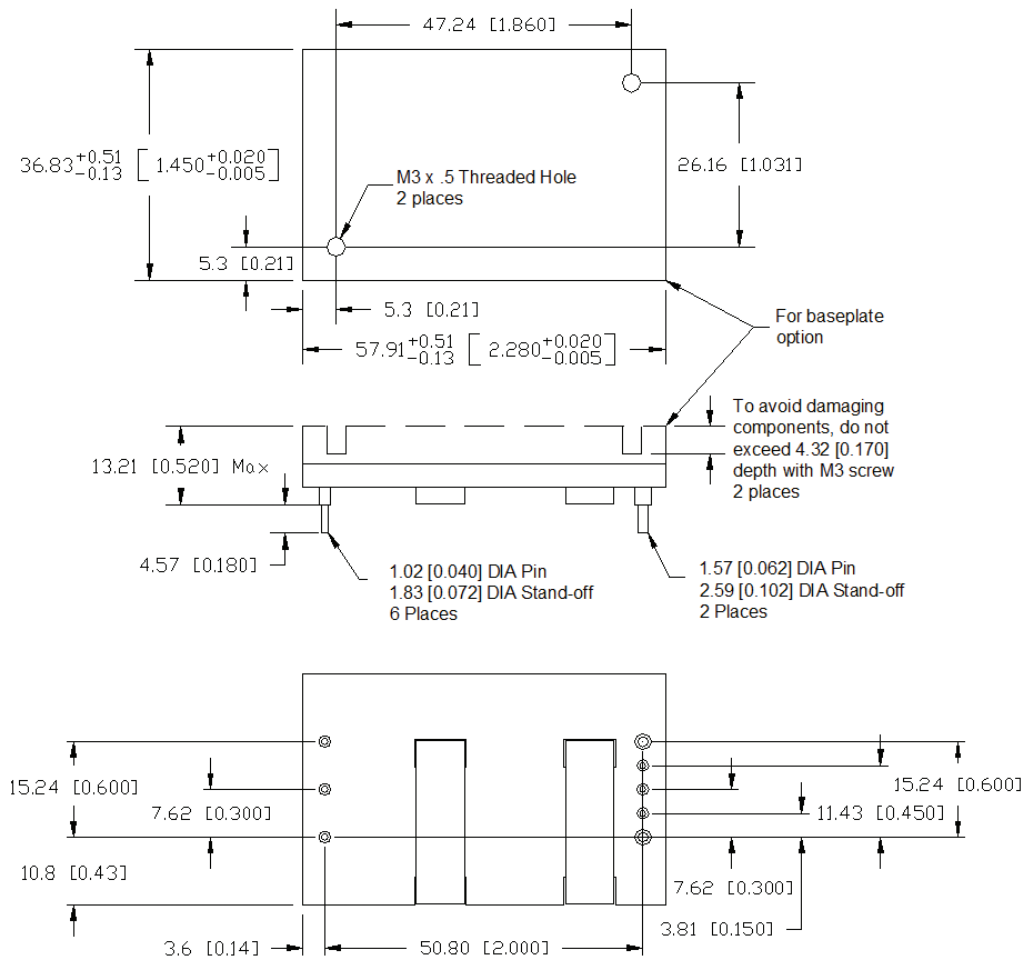



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
info@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
info@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
info@tdk-lambda.co.il
emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tla.powersolutions@tdk.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tlc.powersolutions@tdk.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tts.marketing@tdk.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com

